

Compact & versatile, easy to use, easy to install and portable speaker. 5" coaxial speaker offering a coverage of 70° conical dispersion and 117dB SPL.



Key features

- Compact & versatile
- Easy to use, easy to install
- Portable
- Available in black or white

Applications

- PA system
- Clubs & theatres
- Houses of worship
- Solo artists, band, DJ
- Public address
- Commercial complex

General description & specifications

The CPS-5 is a two-way passive vented system offering a coverage of 70° conical dispersion, with a 5" coaxial speaker (1.5" LF voice coil and 1" HF voice coil) and 117 dB SPL (300 W program) in a compact enclosure designed for short throw applications.


Due to its small size and sleek design, this system suits very well indoor installation and also can be used as background sound reinforcement.

Weight has been left as low as possible providing easy set ups in fixed installation as well as easy transport for portable applications.

Technical Data

Components	1 x 5" coaxial speaker with LF 1.5" and HF 1" voice coil
Frequency range	64 Hz - 20 KHz (-10dB)
Frequency response	90 Hz - 20 KHz (± 3dB)
Sensitivity	93 dB (1W@1m)
Max SPL	114 dB / 120 dB peak
Coverage	70° conical dispersion
Power	150 W AES (300 W program, 600 W peak)
Nominal Impedance	16 Ω
Connectors	2 x NEUTRIK Speakon NL4
Finish	Polyurea coating - available in RAL colour on demand
Material	9 mm premium birch plywood
Dimensions	152 x 152 x 221 mm (H x W x D)
Weight	3 Kg (6.6 lbs)

Dimensional Drawing

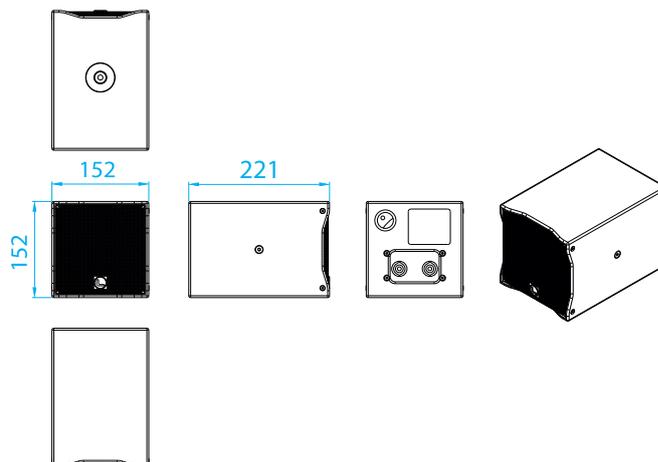

Accessories

	MS-5CX	Quick Coupler for 3/8" to 5/8" stand
	UBR-CPS5	Wall bracket for the CPS-5
	SP-5CX	35mm Speaker pole to 3/8" male thread